



Air Pumps & Gas and Liquid Transfer Pumps

DC MOTOR

APN/APN-W

Extensive Product Range
Wide Variation
Application Flexibility



The Heart of Industry

Diaphragm Air Pumps APN

Suitable for Built-in
Equipment.
Diaphragm Air Pump.



Clean Air Transfer

A diaphragm pump directly connected to the motor provides clean air transfer without the use of oil. Ideal for medical, sampling, and other applications in which clean air needs.



High Efficiency Design

A use of molded parts enhances the pump performance and efficiency. The high-power motor also improves the starting characteristic.



Superior Durability

Fiber reinforced diaphragms, enlarged bearings and enhanced connecting rods have further improved reliability and durability in order for the pump to run over an extended period of time in a continuous operation.



Ease of Maintenance

The pump head consists of only a few parts and can easily be assembled and disassembled.*

*Excluded some models.

Application Examples

Analyzers

Medical analyzers (biochemical analyzers [for medical waste liquor/washings collection]), environmental analyzers (spectral photometers [for material adsorption], leak testers, dust counters)



Laboratory

Aspirators, liquid chromatography, particle counters, leak testers, sprays, culture apparatus, aseptic baths.



Gas and Liquid Transfer Pumps

APN-W

Maintaining the Features of the APN Series.

Lightweight and Compact Design.
Gas-Liquid Transfer Capability.



Compact and Lightweight

A compact and lightweight design is used that is perfect fit for built-in applications and for waste recovery. A structure with high corrosion resistance and enhanced reliability / durability enables continuous operation for an extended period of time and ensures long life.



Oil-Free Design Self-Priming Capability

The motor-driven diaphragm pumps are oil-free and are most suitable for usage requiring clean gas and liquid transfer. A wide variety of models are available for various usage. Self-priming capability makes end user's piping easily.



Unique Valve Design Flush Groove

To improve sealing performance even when the pump is stationary, a unique valve is designed to be pressed against the valve seat. A flush groove design is adapted in the valve seat to prevent accumulating debris when the debris is accidentally mixing in the pumped liquid. The flush groove helps to prevent accumulating the debris between valve and the valve seat reducing a self-priming failure.



Diaphragm Durability

The diaphragm is made thick regarding its moving parts, in order to withstand the pump pressure in gas-liquid transferring.




Medical

Aspirators, nebulizers, low-frequency therapy equipment, blood-pressure gauges, endoscopes, X-ray film adsorption/transfer equipment, gas sterilizers, tappers, artificial respirators, interferential current therapy equipment, normal saline solution sprays, massagers, pressurization/ vacuum sources for various devices



Specifications

APN Diaphragm Air Pumps

Model	Gas Max. flow 					Max. Vacuum 			Max. Discharge pressure 		
	L/min	1.0		10.0	30.0	kPa	26.66	101.32 79.98	0.02	0.06	0.10 MPa
S041	Brushless motor					0.8	9.33				0
051	Brushless motor					1.0	61.32				0.05
085	Brushed motor					6.0	61.32				0.08
110	Brushless motor					14.0	23.99				0.10

APN-W Gas and Liquid Transfer Pumps

Model		Gas-liquid Max. capacity			Gas Max. flow	30.0	Max. Vacuum	101.32 79.98	Max. Discharge pressure		
		L/min	1.0	10.0			kPa	26.66	0.02	0.06	0.10 MPa
05	Brushed motor						0.05	87.99			0.01
10	Brushed motor						0.1	74.66			0.03
	Brushed motor						0.2	74.66			0.03
	Brushless motor						0.18	74.66			Note1 0.03
20	Brushed motor						0.2	74.66			0.03
	Brushless motor						0.26	74.66			Note1 0.03
30	Brushed motor						0.3	47.99			0.08
	Brushless motor						1.2	47.99			0.08
60	Brushed motor						0.3	47.99			0.08
	Brushless motor						1.0	47.99			0.08
P60	Brushless motor						0.6	47.99			Note2 0.08
085	Brushed motor						2.4	47.99			0.08
							0.5	34.66			0.05
							4.0				

Note1: Max. discharge pressure of the gas-liquid transfer is 0.1MPa.

Note2: Max. discharge pressure of the gas-liquid transfer is 0.05MPa.

APN-S041

P. 5, 6



APN-085

P. 9, 10



APN-110

P. 11, 12



APN-051

P. 7, 8



Model		Power consumption (W) DC12/24	Rated current (A) DC12/24	Rated voltage (V)	Connection size IN/OUT (mm)	Mass (kg)	Allowable gas temp. (°C)	Allowable ambient temp. (°C)	Limit cold start temperature (°C)
S041	Brushless motor	-/6	-/0.25 or less	DC24	Hose Ø4.5	0.4	0 to 40	0 to 40	0
051	Brushless motor	-/6	-/0.25	DC24	Hose Ø8, Thread Rc1/8	0.5	5 to 40	5 to 40	5
085	Brushed motor	19/19	1.6/0.8	DC12/24	Hose Ø8, Thread Rc1/4, G1/4	1.1	0 to 40	0 to 40	10
110	Brushless motor	-/33.6	-/1.4	DC24		1.4		5 to 40	5

Model		Power consumption (W) DC12/24	Rated current (A) DC12/24	Rated voltage (V)	Connection size IN/OUT (mm)	Mass (kg)	Allowable gas temp. (°C)	Allowable liquid temp. (°C)	Limit cold start temperature (°C)
05	Brushed motor	4.8/4.8	0.4/0.2	DC12/24	Hose Ø4.5	0.11	5 to 40	10 to 40	5
	Brushed motor								
10	Brushless motor	-/7.2	-/0.3	DC24	Hose Ø5	0.2			
	Brushed motor	-/4.8	-/0.2			0.11			
20	Brushless motor	-/7.2	-/0.3		Hose Ø5.5	0.2			
	Brushed motor	-/11.5	-/0.48			0.21			
30	Brushless motor	-/14.4	-/0.6			0.24			
	Brushed motor	-/11.5	-/0.48			0.21			
60	Brushless motor	-/14.4	-/0.6			0.24			
	Brushed motor	-/20.6	-/0.86						
P60	Brushless motor	-/20.6	-/0.86						
085	Brushed motor	19/19	1.6/0.8	DC12/24	Thread Rc1/8	2.5	0 to 40	5 to 40	FKM: 10 EPDM: 5

Liquid temperature at 20°C

APN-05/10/20-W

P. 13, 14

**APN-30/60-W**

P. 15, 16

**APN-085-W**

P. 17, 18



APN-S041

Diaphragm Air Pumps

Max. flow **0.8** L/min

Max. vacuum **9.33** kPa(abs.)



Observe the maximum allowable discharge pressure of 0.0MPa.

Specifications

Model	Max. flow (L/min)	Max. vacuum (kPa[abs.])	Power consumption (W)	Rated current (A)	Rated voltage (V)
APN-S041ME-D3 *	0.8	9.33	6.0	0.25 or less	DC24
APN-S041ME-D4 *					

Connection size IN/OUTHose barb Ø4.5mm

Mass0.4kg


Allowable gas temp.0 to 40°C

Allowable ambient temp.0 to 40°C

Minimum starting temperature ...0°C

* D3: 2 wire, D4: 4 wire

Construction and Materials

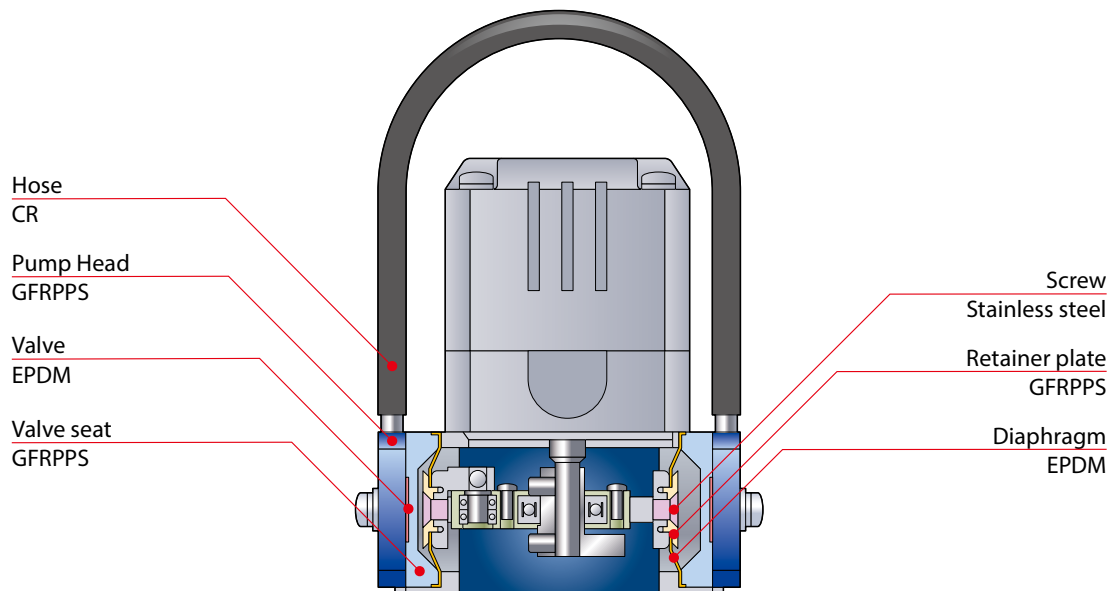

Pump Identification

APN - S 041 M E - D4 - 01

1 2 3 4 5 6 7

1 Pump head
S : Dual-head
with in-line tubing

2 Pump size
041

3 Type
M : Vacuum


4 Diaphragm/Valve materials
E : EPDM

5 Pump connection
No symble: Hose barb (ø4.5)


6 Motor
D3 : Brushless 24VDC
(without speed control)
D4 : Brushless 24VDC
(with Variable speed control)

7 Special version

Performance Curves

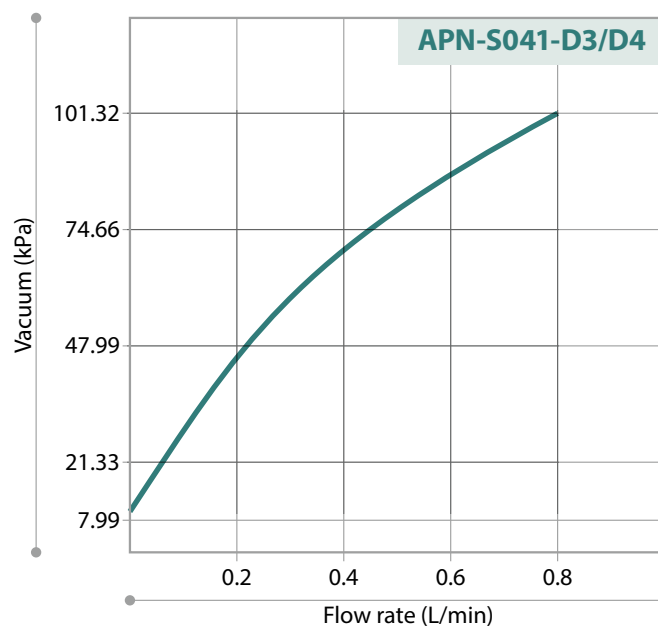

Dimensions in mm

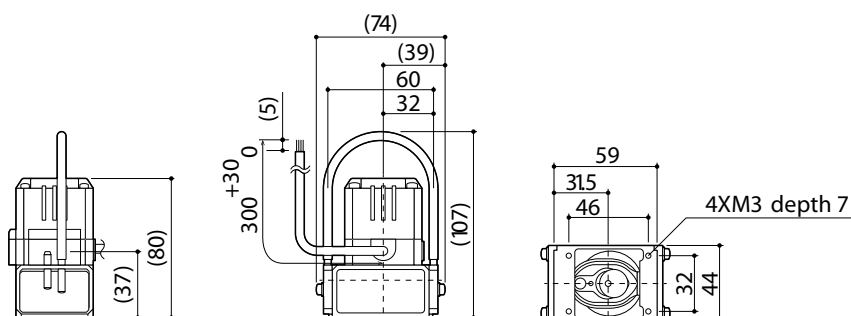

APN-051

Diaphragm Air Pumps

Max. flow 1.0 L/min

Max. vacuum 61.32 kPa(abs.)

Max. discharge pressure 0.05 MPa



Specifications

Model	Max. flow (L/min)	Max. vacuum (kPa[abs.])	Max. discharge pressure (MPa)	Power consumption (W) DC24	Rated current (A) DC24	Rated voltage (V)
APN-051	1.0	61.32	0.05	6	0.25	DC24

Connection size IN/OUT Hose barb Ø5mm, Ø8mm, Female thread Rc1/8


Mass 0.5kg

Allowable gas temp. 0 to 40°C

Allowable ambient temp. 0 to 40°C

Minimum starting temperature ... 5°C

Construction and Materials

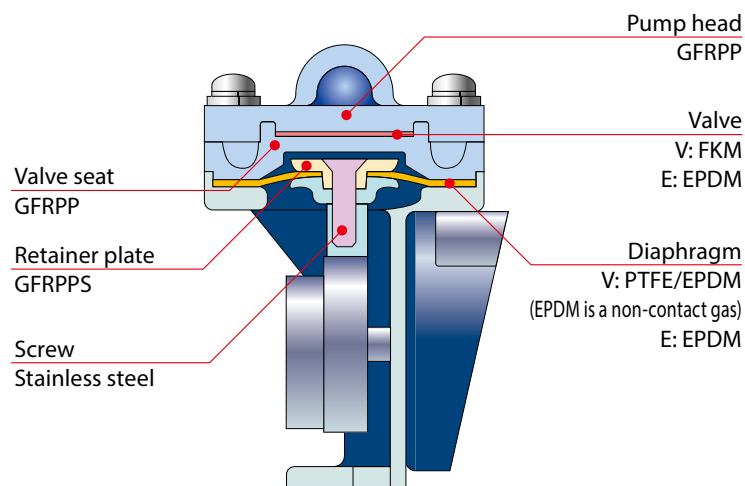

Pump Identification

APN - 051 L E X - D3 - 01

1 2 3 4 5 6

1 Pump size
051

2 Pump head
L : Horizontally oriented
H : Vertically oriented


3 Diaphragm/Valve materials
V : PTFE/EPDM • FKM
E : EPDM • EPDM

4 Pump connection
No symbol: Hose barb (Ø8)
X : Female thread (Rc1/8)

5 Motor
D3 : Brushless 24VDC
(without speed control)


6 Special version

Performance Curves

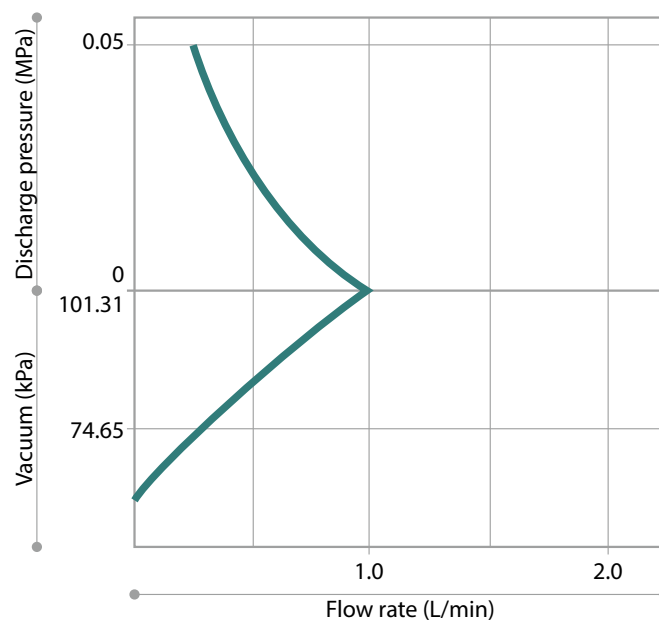


Dimensions in mm

APN-051L (lateral direction)



APN-051H (longitudinal direction)

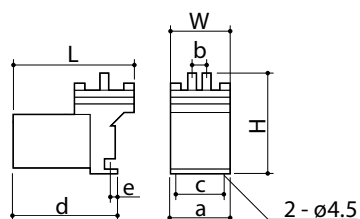

Model	W	H	L	a	b	c	d	e	f
APN-051L	86	(75)	(90)	46	–	32	(76)	6.5	(67)
APN-051H	46	(78)			13				–

APN-085

Diaphragm Air Pumps

Max. flow 6 L/min

Max. vacuum 34.66 to 61.32 kPa(abs.)

Max. discharge pressure 0.08 MPa



Specifications

Model	Max. flow (L/min)	Max. vacuum (kPa)	Max. discharge pressure (MPa)	Power consumption (W) DC12/24	Rated current (A) DC12/24	Rated voltage (V)
APN-085-D1/D2	6	61.32	0.08	19/19	1.6/0.8	DC12/24
APN-085L/H-D1/D2		34.66				

Connection size IN/OUT Hose Ø8mm, Female thread Rc1/4, G1/4


Mass 1.1kg

Allowable gas temp. 0 to 40°C

Allowable ambient temp. 0 to 40°C

Minimum starting temperature ...10°C

Construction and Materials

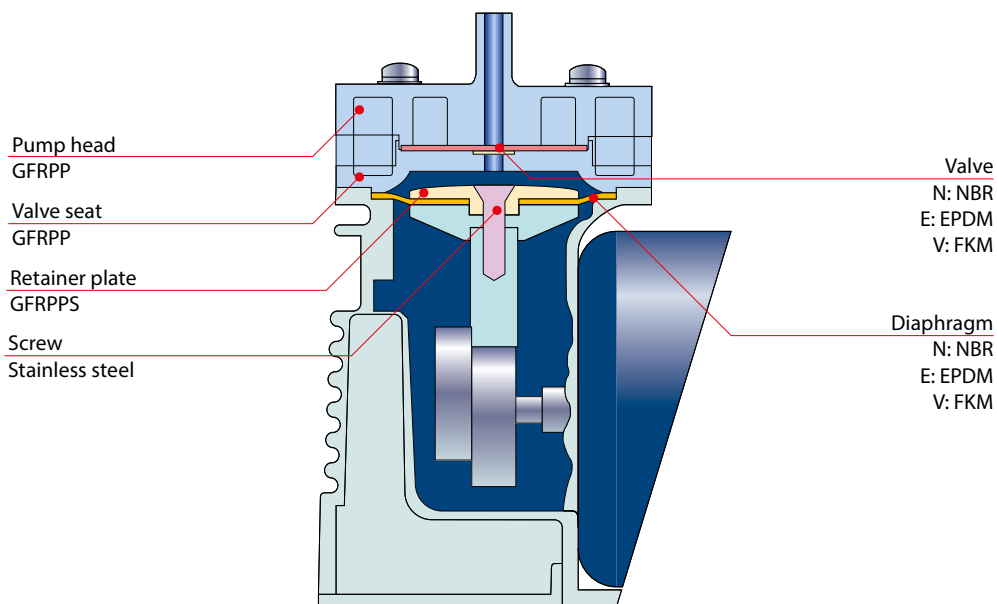

Pump Identification

APN - 085 L V X - D2 - 01

1

2

3

4

5

6

1 Pump size
085

2 Pump head
No symble: Corrosion resistant
L : Horizontally oriented
H : Vertically oriented



3 Diaphragm/Valve materials
N : NBR
E : EPDM
V : FKM

4 Pump connection
No symble : Tube (ø8)
X : Thread (Rc1/4)
X1 : Female thread (G1/4)

5 Motor
D1 : Brushed 12VDC
D2 : Brushed 24VDC


6 Special version

Performance Curves

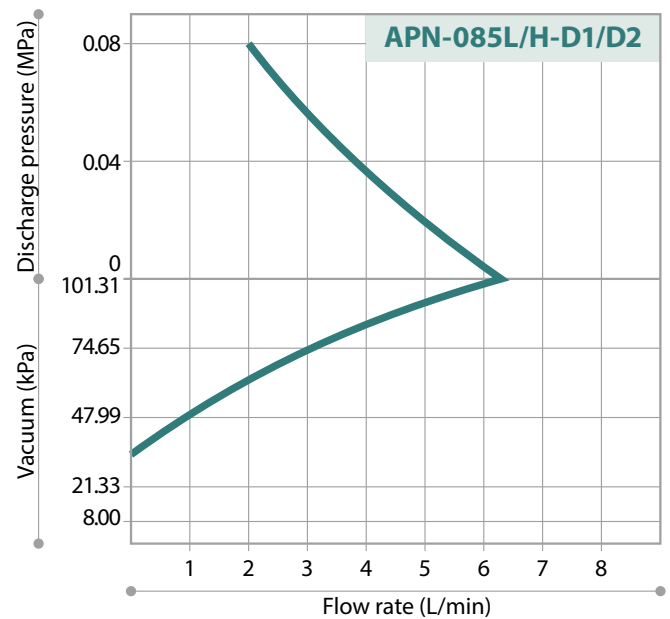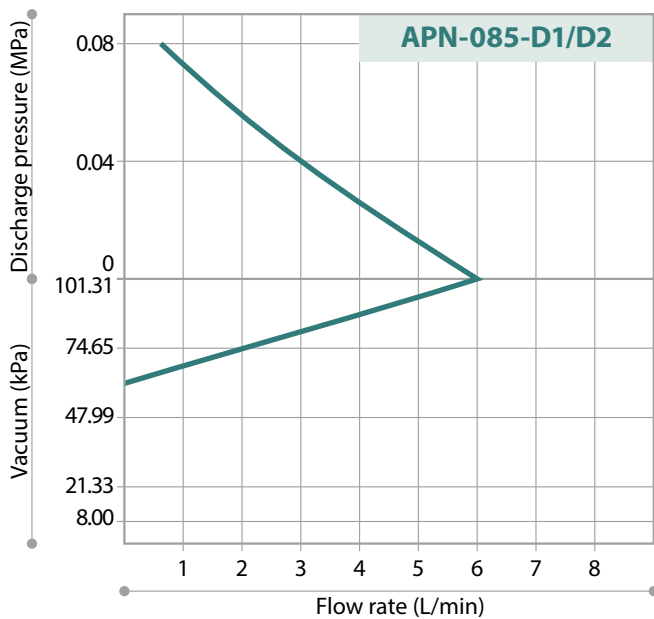


Dimensions in mm

APN-085-D1/D2




APN-085L-D1/D2



2-5.5

4-5.5X23



Model	W	H	L	a	b	c	d	e	f
APN-085-D1/D2	80	(136)	(135)	71	66	24	57	21.5	18.5
APN-085L/H-D1/D2		(121)		72		-	56.5		

APN-110

Diaphragm Air Pumps

Max. flow 14 L/min

Max. vacuum 23.99 kPa(abs.)

Max. discharge pressure 0.1 MPa



Specifications

Model	Max. flow (L/min)	Max. vacuum (kPa[abs.])	Max. discharge pressure (MPa)	Power consumption (W)	Rated current (A)	Rated voltage (V)
APN-110K/L-D4	14	23.99	0.1	33.6	1.4	DC24

Connection size IN/OUTHose barb Ø8mm, Female thread Rc1/4, G1/4


Mass1.4kg

Allowable gas temp.0 to 40°C

Allowable ambient temp.5 to 40°C

Minimum starting temperature ...5°C

Construction and Materials

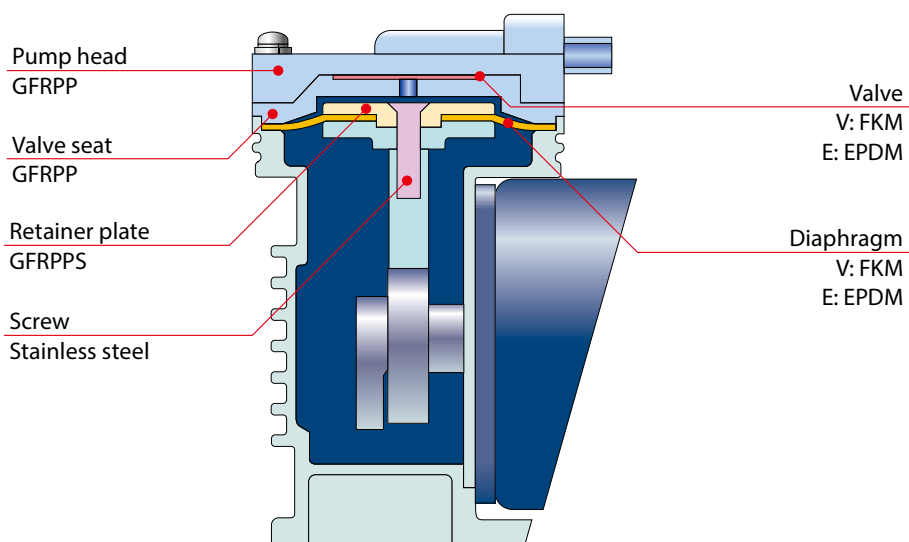

Pump Identification

APN - 110 L V X - D4 - 02

1 2 3 4 5 6

1 Pump size
110

3 Inlet/outlet
L : In-line type
K : Parallel type


4 Diaphragm/Valve materials
V : FKM
E : EPDM

5 Pump connection
No symble: Hose barb (O.D.ø8)
X : Thread (Rc1/4)
X1 : Female thread (G1/4)

6 Motor
D4 : Brushless 24VDC (with Variable speed control)

7 Special version

Performance Curves

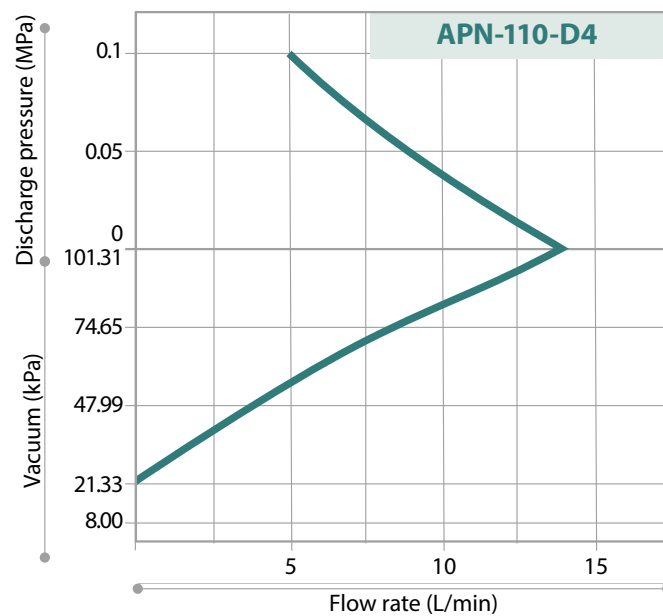

Dimensions in mm



APN-110L V/E X/X1



APN-110K V/E(X/X1)



APN-110L V/E



Model	W	H	L	a	f
APN-110K V/E	78	134	134	74	124
APN-110K V/E X/X1			146		
APN-110L V/E			134		
APN-110L V/E X/X1			134		

APN-05/10/20-W

Gas and Liquid Transfer Pumps

Max. capacity (Gas-liquid) 0.05 to 0.26 L/min

Max. flow (Gas) 0.1 to 0.2 L/min

Max. vacuum 74.66 to 87.99 kPa(abs.)

Max. discharge pressure 0.03 MPa

Always use a suction valve to adjust an air / liquid flow.



APN-10-W
Brushed motor type



APN-10-W
Brushless motor type

Specifications

Model	Motor	Gas-liquid Max. capacity (L/min)	Gas Max. flow (L/min)	Max. vacuum (kPa[abs.])	Max. discharge pressure (MPa)	Power consumption (W) DC12/24	Rated current (A) DC12/24	Rated voltage (V)
APN-05-W		0.05	0.1	87.99	0.01	4.8/4.8	0.4/0.2	DC12/24
APN-10-W	Brushed	0.1	0.2	74.66	0.03			
	Brushless	0.18			0.03 ^{Note}	-/7.2	-/0.3	
APN-20-W	Brushed	0.2			0.03	-/4.8	-/0.2	DC24
	Brushless	0.26			0.03 ^{Note}	-/7.2	-/0.3	

Connection size IN/OUT APN-05/10-W: Hose barb Ø4.5mm, APN-20-W: Hose barb Ø5mm

Mass Brushed type: 0.11kg, Brushless type: 0.2kg


Allowable gas temp. 5 to 40°C

Allowable liquid temp. 10 to 40°C

Minimum starting temperature ... 5°C

Note: Max. discharge pressure of the gas-liquid transfer is 0.1MPa.

Construction and Materials

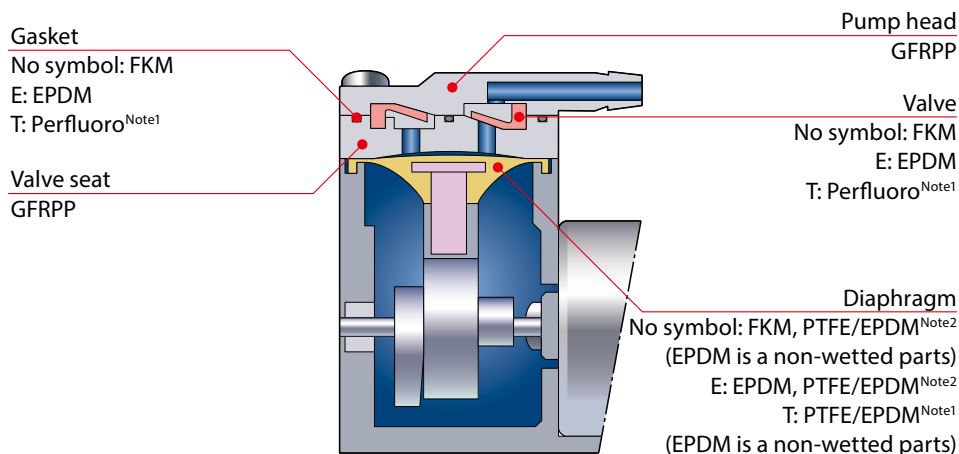

Note1: Special order on APN-10/20-W.

Note2: Diaphragm of APN-10 / 20D3-W is the PTFE / EPDM.

Pump Identification

APN - 10 G E D1 - W 02

1 2 3 4 5 6

1 Pump size
05, 10, 20

2 Bracket type
No symbol : Without base
G : With base

3 Diaphragm/Valve/Gasket materials
No symbol : FKM
E : EPDM^{Note1}
T : PTFE/EPDM Perfluor^{Note1}



4 Motor
D1 : Brushed 12VDC^{Note2}
D2 : Brushed 24VDC
D3 : Brushless 24VDC^{Note1}

5 Type
W : Gas-liquid transfer

6 Special version


Note1: 10 • 20 only
Note2: 05 • 10 only

Performance Curves

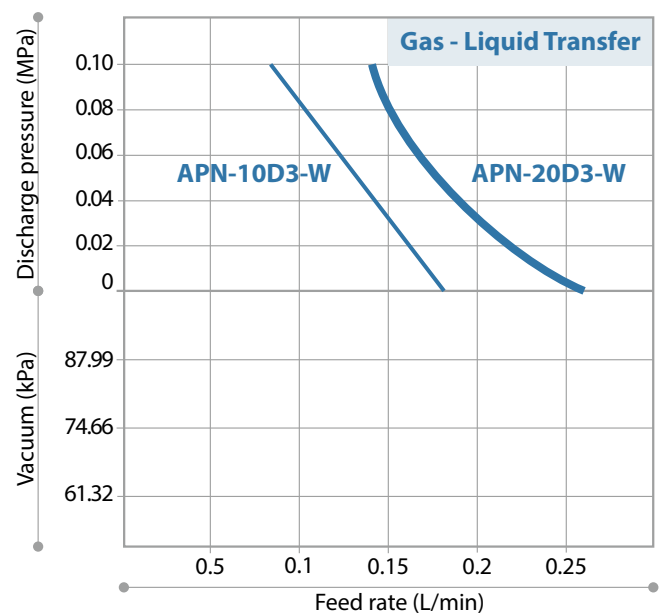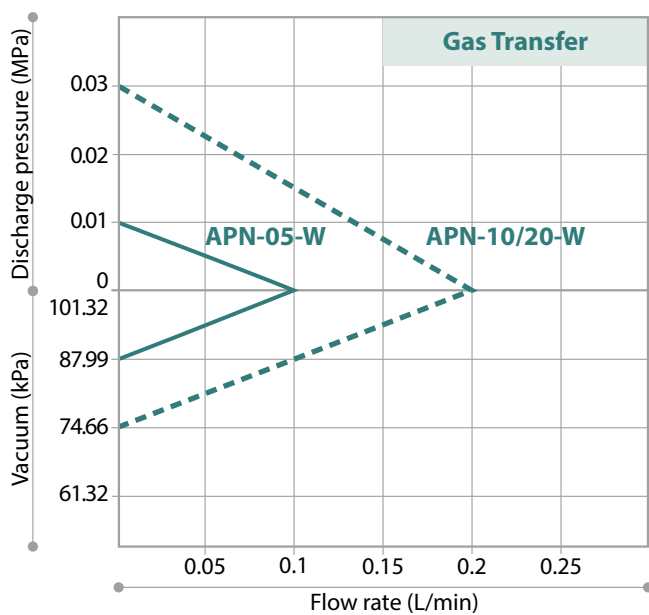


Dimensions in mm


APN-05/10-W




APN-20-W



APN-10-W Brushless



APN-20-W Brushless



APN-30/60-W

Gas and Liquid Transfer Pumps

Max. capacity (Gas-liquid) **0.3 to 1.0 L/min**

Max. flow (Gas) **1.0 to 2.4 L/min**

Max. vacuum **47.99 kPa(abs.)**

Max. discharge pressure **0.08 MPa**

Always use a suction valve to adjust an air / liquid flow.



APN-30/60-W
Brushed motor type



APN-30/60-W
Brushless motor type



APN-P60-W
Dual head type

Specifications

Model	Motor	Gas-liquid Max. capacity (L/min)	Gas Max. flow (L/min)	Max. vacuum (kPa[abs.])	Max. discharge pressure (MPa)	Power consumption (W)	Rated current (A)	Rated voltage (V)
APN-30-W	Brushed	0.3	1.2	47.99	0.08	11.5	0.48	DC24
	Brushless		1.0			14.4	0.6	
APN-60-W	Brushed	0.6	1.2			11.5	0.48	
	Brushless		1.0			14.4	0.6	
APN-P60-W		1.0	2.4		0.08 ^{Note}	20.6	0.86	

Connection size IN/OUTHose barb Ø5.5mm

Mass30/60 Brushed type: 0.21kg, 30/60 Brushless type / P60: 0.24kg


Allowable gas temp.5 to 40°C

Allowable liquid temp.10 to 40°C

Minimum starting temperature ...5°C

Note: Max. discharge pressure of the gas-liquid transfer is 0.05MPa.

Construction and Materials

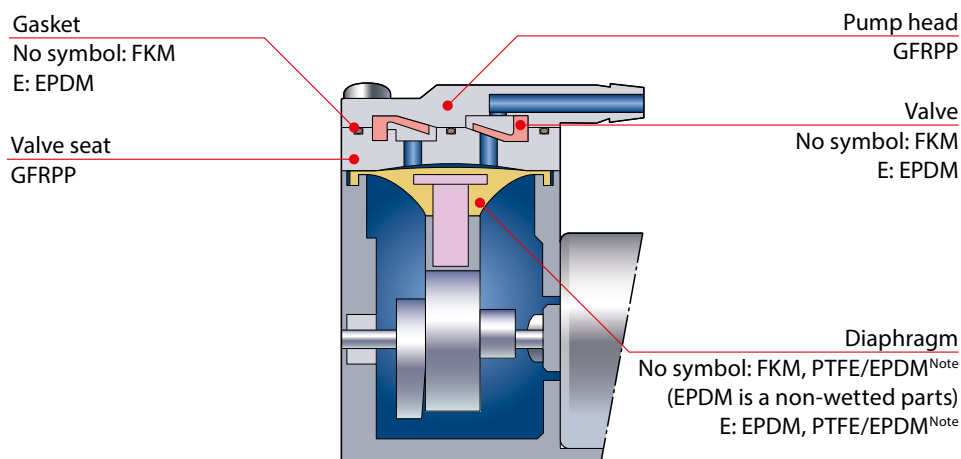

Note: Diaphragm of APN-P60-W is PTFE / EPDM.



Pump Identification

APN - 30 G E D1 - W 02					
1	2	3	4	5	6
1 Pump size 30, 60		4 Motor D1 : Brushed 12VDC Note D2 : Brushed 24VDC D3 : Brushless 24VDC (without speed control)			
2 Bracket type No symbol : Without base G : With base		5 Type W : Gas-liquid transfer			
3 Diaphragm/Valve/Gasket materials No symbol : FKM E : EPDM		6 Special version			

Note: Please contact us for details about brushed 12VDC products.



APN - P 60 G E D4 - W 02						
1	2	3	4	5	6	7
1 Pump head P : Dual-head with parallel tubing		5 Motor D4 : Brushless 24VDC (with Variable speed control)				
2 Pump size 60		6 Type W : Gas-liquid transfer				
3 Bracket type No symbol : Without base G : With base		7 Special version				
4 Diaphragm/Valve/Gasket materials No symbol : PTFE/EPDM • FKM E : PTFE/EPDM • EPDM						

Performance Curves

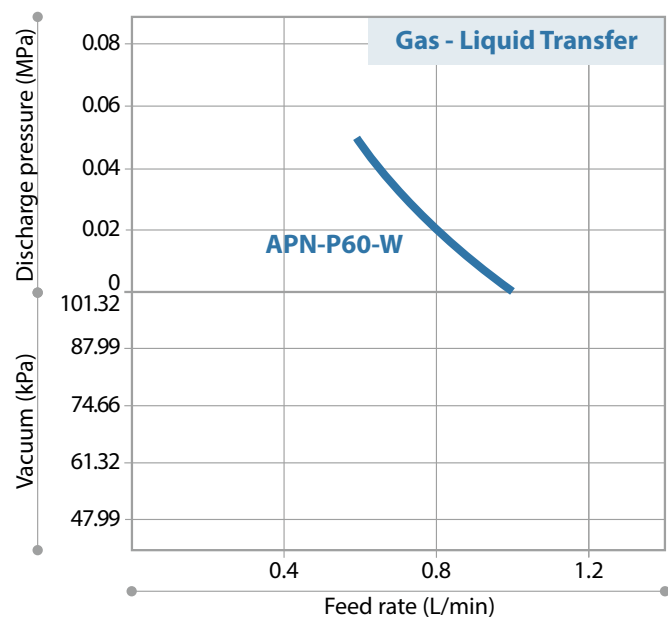
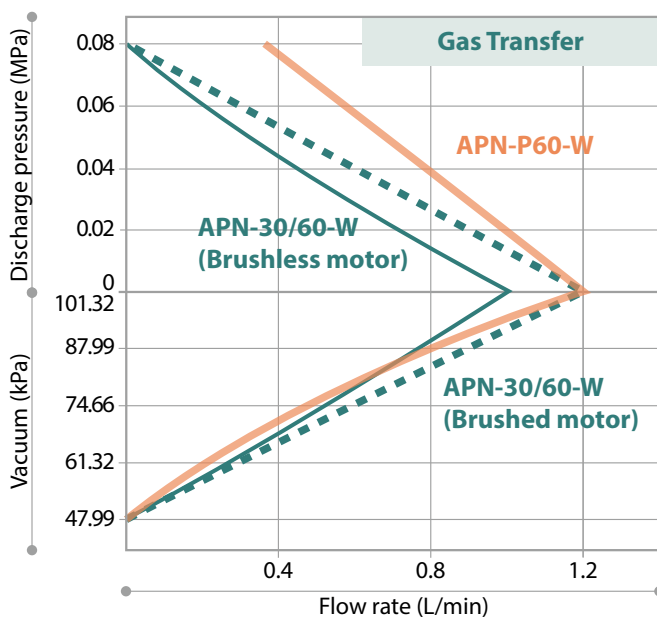


Dimensions in mm



APN-30/60-W Brushed





APN-30/60-W Brushless



APN-P60-W without base



APN-P60-W with base



APN-085-W

Gas and Liquid Transfer Pumps

Max. capacity (Gas-liquid)	0.5 L/min
Max. flow (Gas)	4.0 L/min
Max. vacuum	34.66 to 37.33 kPa(abs.)
Max. discharge pressure	0.05 MPa

Always use a suction valve to adjust an air / liquid flow.



Specifications

Model		Gas-liquid Max. capacity (L/min)	Gas Max. flow (L/min)	Max. vacuum (kPa[abs.])	Max. discharge pressure (MPa)	Power consumption (W) DC12/24	Rated current (A) DC12/24	Rated voltage (V) DC12/24
APN-085-W	EX type	0.5	4.0	34.66	0.05	19/19	1.6/0.8	DC12/24
	VX type			37.33				

Connection size IN/OUTFemale thread Rc1/8


Mass2.5kg

Allowable gas temp.0 to 40°C

Allowable liquid temp.5 to 40°C

Minimum starting temperature ...FKM: 10°C, EPDM: 5°C

Construction and Materials

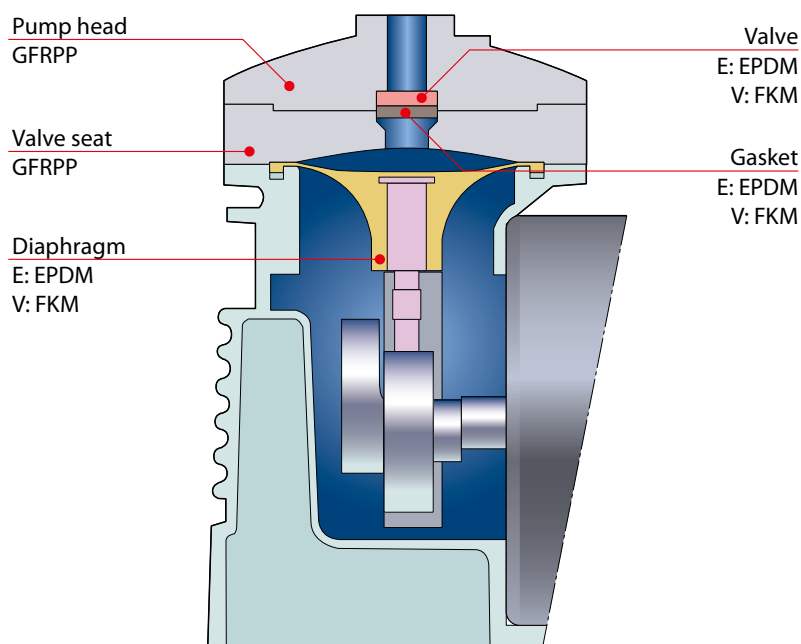

Pump Identification

APN - 085 E X - D1 - W 02

1

2

3

4

5

6

1 Pump size
085

2 Diaphragm (Valve) materials
E : EPDM
V : FKM


3 Connectuon size
X : Female thread (Rc1/8)

4 Motor
D1 : Brushed 12VDC
D2 : Brushed 24VDC


5 Type
W : Gas-liquid transfer

6 Special version

Performance Curves

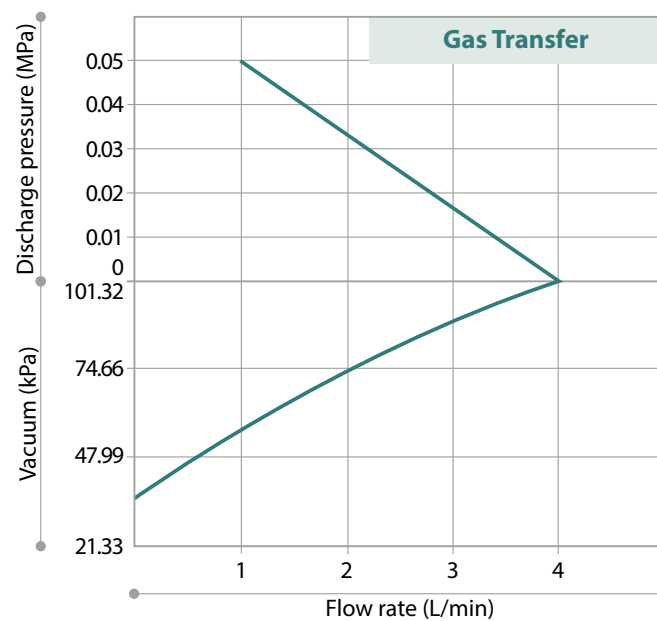

Dimensions in mm

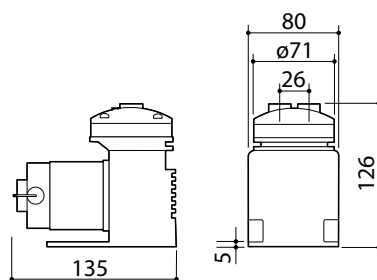

Optional Accessory

Muffler / Filter (APN series)

To be used as muffler when installed at discharge side and also as filter when installed at suction side. (Check valve incorporated filter is available as option)

- This may not be usable for some pump models and pump head design.
- When installed, performance will be affected.



AF - 2 V - 1 C

1 2 3

1 Materials

V : FKM

E : EPDM

N : CR / NBR
(gasket/O-ring,
check valve)

2 Connection

diameter

1 : G1/8 (APN-215)

2 : G1/4 (APN-085, 110)

3 Options

C : with check
valve
incorporated

IWAKI CO., LTD. 6-6 Kanda-Sudacho 2-chome Chiyoda-ku Tokyo 101-8558 Japan TEL : (81)3 3254 2935 FAX : 3 3252 8892

IWAKI has global net work.
Please find your distributor location at

www.iwakupumps.jp

European Headquarter
Germany
The Netherlands (Netherlands Branch)
Italy (Italy Branch)
Spain (Spain Branch)
Poland (East Europe Branch)
Denmark
Finland
Norway
Sweden
Belgium
France

IWAKI Europe GmbH
IWAKI Europe GmbH
IWAKI Europe GmbH
IWAKI Europe GmbH
IWAKI Europe GmbH
IWAKI Nordic A/S
IWAKI Suomi Oy
IWAKI Norge AS
IWAKI Sverige AB
IWAKI Belgium N.V.
IWAKI France S.A.

TEL: (49)2154 9254 0
TEL: (49)2154 9254 50
TEL: (31)74 2420011
TEL: (39)0445 561219
TEL: (34)934 741 638
TEL: (48)12 347 0755
TEL: (45)48 242345
TEL: (358)10 201 0490
TEL: (47)23 38 49 00
TEL: (46)8 511 72900
TEL: (32)13 670200
TEL: (33)1 69 63 33 70

FAX: (49)2154 9254 48
FAX: (49)2154 9254 55
FAX: (49)2154 9254 48
FAX: (39)0445 569088
FAX: (34)934 741 638
FAX: (48)12 347 0900

FAX: (49)2154 9254 48
FAX: (49)2154 9254 55
FAX: (49)2154 9254 48
FAX: (39)0445 569088
FAX: (34)934 741 638
FAX: (48)12 347 0900

U.S.A.
Brazil
China (Shanghai)
China (Hong Kong)
China (Guangzhou)
China (Shenzhen)
Singapore
Indonesia (Indonesia Office)
Malaysia
Korea
Taiwan
Thailand
Australia

IWAKI America Inc.
IWAKI Do Brasil Comercio De Bombas Hidraulicas LTDA.
IWAKI Pumps (Shanghai) Co., Ltd.
IWAKI Pumps Co., Ltd.
GFTZ IWAKI Engineering & Trading Co., Ltd.
IWAKI Pumps (Shenzhen) Co., Ltd.
IWAKI Singapore Pte Ltd.
IWAKI Singapore Pte Ltd.
IWAKI SDN. BHD.
IWAKI Korea Co., Ltd.
IWAKI Pumps Taiwan Co., Ltd.
IWAKI (Thailand) Co., Ltd.
IWAKI Pumps Australia Pty Ltd.

TEL: (1)508 429 1440
TEL: (55)19 3244 5900
TEL: (86)21 6272 7502
TEL: (852)2607 1168
TEL: (86)20 84350603
TEL: (86)0755 8656 3696
TEL: (65)6316 2028
TEL: (62)21 6906606
TEL: (60)3 7803 8807
TEL: (82)2 6238 4800
TEL: (886)2 8227 6900
TEL: (66)2 322 2471
TEL: (61)2 9899 2411

FAX: (1)508 429 1386
FAX: (55)19 3244 5900
FAX: (86)21 6272 6929
FAX: (852)2607 1000
FAX: (86)20 84359181
FAX: (65)6316 3221
FAX: (62) 21 6906612
FAX: (60)3 7803 4800
FAX: (82)2 6238 4801
FAX: (886)2 8227 6818
FAX: (66)2 322 2477
FAX: (61)2 9899 2421

() Country codes

Caution for safety use:
Before use of pump, read instruction manual carefully to use the product correctly. Actual pumps may differ from the photos. Specifications and dimensions are subject to change without prior notice. For further details please contact us.

Legal attention related to export.

Our products and/or parts of products fall in the category of goods contained in control list of international regime for export control. Please be reminded that export license could be required when products are exported due to export control regulations of countries.

The posting and copying from this catalogue without permission is not accepted firmly.