IWAKI

Metering Pumps

LK



Applicable to the Many Diverse Needs of Chemical Feeding

The Heart of Industry

Suitable for Many Chemical Liquid Feeding



IWAKI's LK series metering pump consists of the worm gear type dual-cam driving section, which is compact yet rigid and reliable. With long and market-proven experience, IWAKI has employed state-of-the-art pump technologies in the development of an ideal type of chemical feeding pump which has advantages such as quality, performance, ease of operation and cost efficiency. The LK series is suitable for many chemical liquid feeding processes used in a wide range of fields, including water treatment, chemicals, fabrics, paper mill, food processing, and medicine.



LK-F57VCT



Various Types and Materials

The LK series is available to suit each user's needs in accordance with feeding rate from small to large capacity. Also, material variation has been improved. Selection of the pump material most suitable for the applied liquid is possible with six different types available.

High Performance and Application-Oriented Versatile Design


Discharge accuracy (stability) is within ±2% FS. Reliability is considerably enhanced through efforts to improve the linearity of the stroke / discharge ratio as well as the dispersion between stroke.
Two types of joints flange and hose joints are standardized for the connections. (LK-F11 to LK-F47)
The optimum piping system can be selected.

LK-F57S6T



LK-C86VCT

Construction

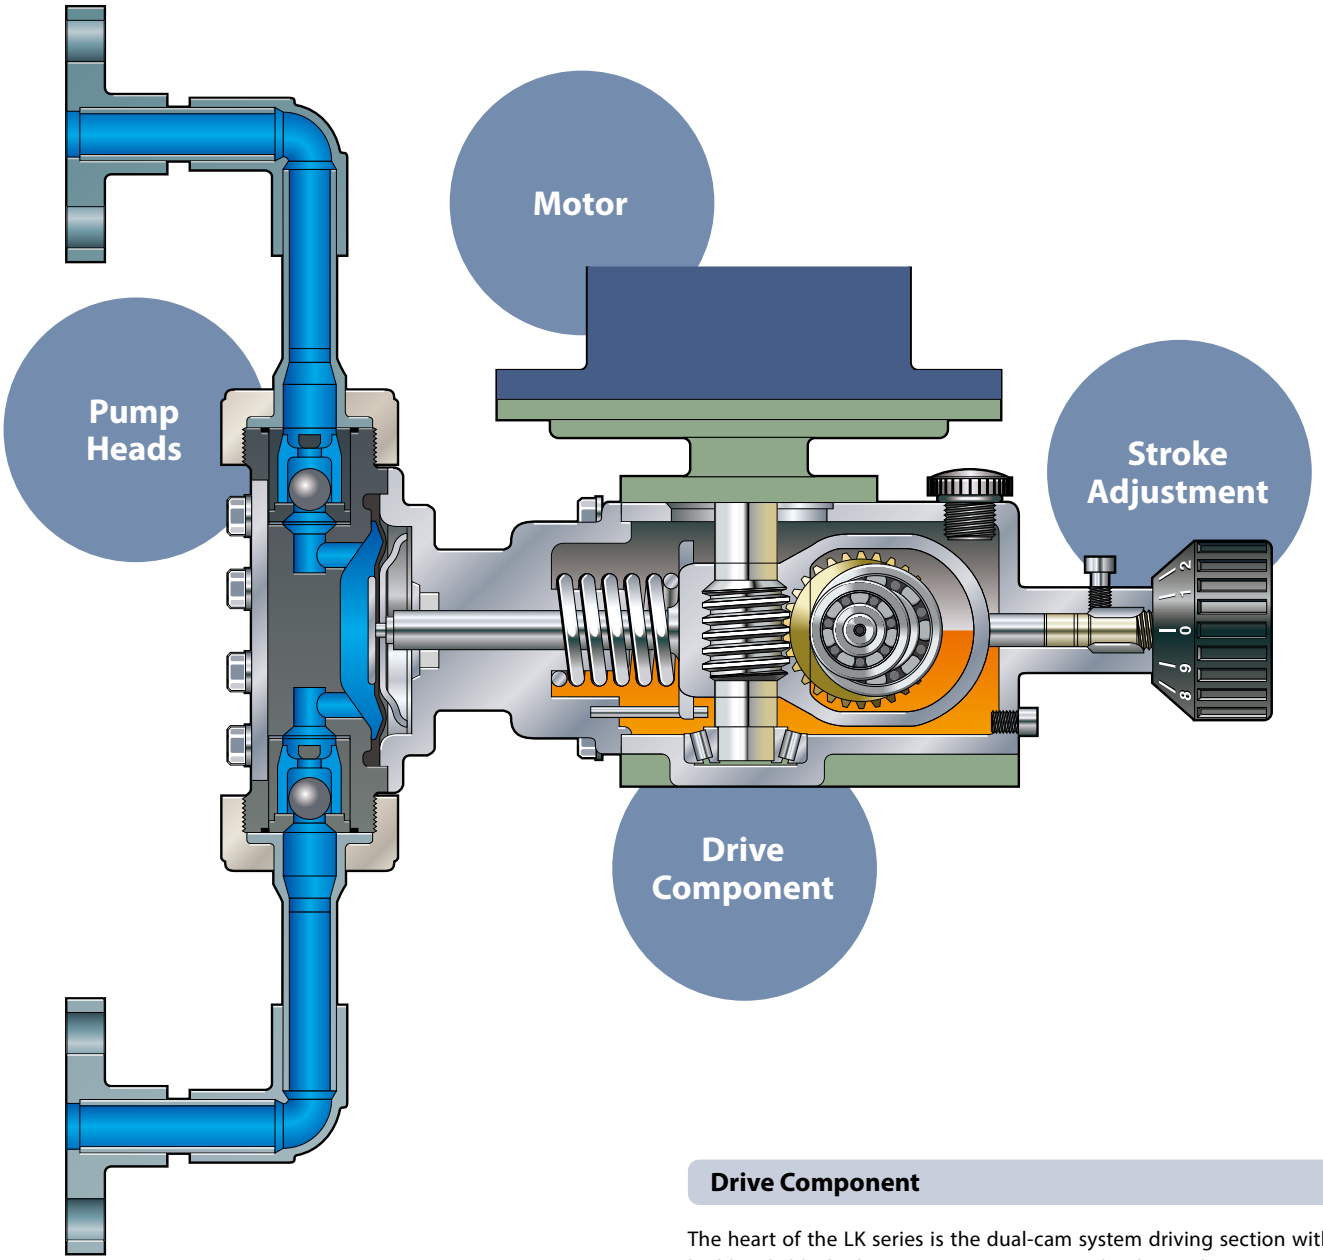

Pump Heads

Drive from the gear reduction unit is directly transmitted to the diaphragm. This type of metering pump is economical and simple with a high degree of versatility. With the employment of moulded PVC pump-head, and with the new standardization of two types of connections using flanges or hose joints (LK-F11 to LK-F47), not only a saving in parts cost but also improved flexibility of installation has been realized.
The three main pump head materials are PVC, stainless steel, or fluororesin. The most suitable type for the application can be selected from a total of six different materials.

Drive Component

The heart of the LK series is the dual-cam system driving section with a highly reliable, built-in worm gear type speed reducer. The compact and rigid mechanism is a result of the design goal to achieve maximum wear resistance in continuous operation.
In addition to the worm gear which is designed with a considerably large module ratio, the material is aluminium bronze, and a taper roller bearing is used at the end of the worm gear for the efficient transmission of motor power to the pump section.
A fully enclosed oil bath lubrication system is employed to permit outdoor installation. The durability in continuous operation over a long period of time is also excellent.



Motor

LK series pumps can be installed with IEC motors.

Stroke Adjustment

Accurate and reliable stroke setting is possible with the micrometer type dial of the springback type stroke adjustment mechanism.


Materials

Type			VC	VCR	V6	V6R	VS4	S6	S4
Application			Acid		Alkali			Solvent	
Applicable type			F11 to F57 A65 to C87	A5	F11 to F57	A5	A65 to C87	F11 to A57	B65 to C87
Part	Pump head		PVC					SUS316	SCS13
	Valve		CE		SUS316 equivalent		SUS304	SUS316 equivalent	SUS304
	Valve seat	Type 11 to 32	FKM		EPDM		–	SUS316	–
		Type 45 to 87	PVC					SUS316	SUS304
	O ring		FKM		EPDM			–	–
	Valve gasket		PTFE						
	Diaphragm		PTFE coated EPDM						
Liquid temp. range Note			0 - 50 ˚C					0 - 80˚C	

Note: Liquid temp. range is varied by handling chemical. Please contact us.
- VS type for viscosity and slurry is available on special request. Please contact us for details. For information of TC type, please contact IWAKI or nearest distributor.

Typical chemical
VC: Sulfuric acid, Hydrochloric acid, Sodium hypochlorite
V6, VS4: Caustic soda, Coagulant. Calcium hydroxide (low density)
TC: Concentrated sulfuric acid, Hydrofluoric acid, Mixed acid
S6, S4: Organic solvent, Paper making chemicals

Material symbols
SCS13: Stainless-cast steel equivalent to SUS304
CE: Alumina Ceramic
FKM: Fluoro rubber

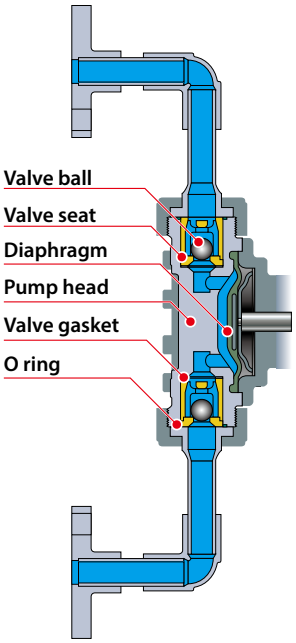

Identification

LK - F 32 VC T
1 2 3 4 5

1 Series name
LK series : Mechanical driven diaphragm type

2 Drive section
F : 0.25kW **A** : 0.37kW, **B** : 0.75kW, **C** : 1.5kW

3 Type No.
First digit : Diaphragm (pump head size)
Second digit : Speed-reducing gear ratio **1** : 1/30, **2** : 1/15, **5** : 1/30, **6** : 1/20, **7** : 1/15

4 Material symbol
Refer to the material table (ex. **VC, V6, VS4, TC, S6, S4**)

5 Connection
None : Flange ("JIS" or others), **T** : Flange ("DIN"), **H** : Hose


Specifications

Model	Capacity L/min	Max. Pressure MPa		Stroke speed spm	Effective diaphragm dia. mm	Max. Stroke length mm	Connection				Motor outout (4 Pole)
							Flange		Hose		
	50Hz	PVC, PVDF	SUS	50Hz			PVC, PVDF	SUS	PVC	PVDF	
LK-F11	0.02	1.0	1.5	48	22	1.5	DN15 (DIN PN10)	DN15 (DIN PN16)	ID4mm (or 5mm) OD9mm	–	0.25kW
F21	0.05	1.0	1.5	48	30	2.0					
F22	0.10	1.0	1.5	96	30	2.0					
F31	0.25	1.0	1.5	48	60	2.5			ID12mm OD18mm	–	
F32	0.50	1.0	1.5	96	60	2.5					
F45	0.85	1.0	1.5	48	72	6.0					
F47	1.7	0.8	0.8	96	72	6.0					
F55	2.8	0.5	0.5	48	100	10	DN25 (DIN PN10)		–	–	
F57	6.0	0.3	0.3	96	100	10					
LK-A55	2.8	0.7	0.7	48	100	10	DN25 (DIN PN10)		–	–	0.37kW
A57	6.0	0.5	0.5	96	100	10					
A65	9.0	0.2	0.2	48	138	17.5	DN40 (DIN PN10)				
LK-B65	9.0	0.5	0.5	48	138	17.5	DN40 (DIN PN10)		–	–	0.75kW
B75	13.3	0.5	0.5	48	150	20	DN50 (DIN PN10)				
LK-C76	20.0	0.5	0.5	72	150	20	DN50 (DIN PN10)		–	–	1.5kW
C86	33.0	0.3	0.3	72	205	20	DN65 (DIN PN10)				
C87	45.0	0.3	0.3	96	205	20					

Note: The capacity is the value when maximum discharge pressure is applied (with pure water at room temperature).
The value may be lager than indicated in the table if the discharge pressure is lower.
- Standard accessory : A siphon preventing valve, strainer and 4m PVC tube are furnished to hose connection type of LK-F11 to LK-F45VCH. A base is furnished to all LK-A, LK-B and LK-C models.
- Frequency control is appliable. Please contact us for details.

Dimensions in mm

Dimensions and configurations may be changed without prior notice for the purpose of product improvement.
Be sure to carry out installation work with the most recent and detailed drawings which are available upon request.
The dimensions may differ with the type of motor installed.
All illustrations show "PVC" type. The suction flange made of SUS is straight.

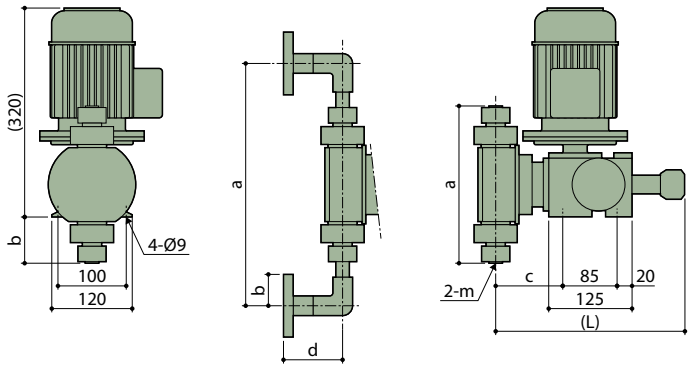

LK-F11 to LK-57


Model	Hose type					Flange type								
	PVC					PVC					SUS			
	L	a	b	c	m	L	a	b	c	d	L	a	b	c
LK- 1	275	146	23	95	Note	(363)	272	86	94	89	332	156	20	92
2		164					290	95				166	25	
3	277	224	62	97		(377)	350	125	97		337	201	42	
4	281	243	72	99		(370)	369	135	99		343	270	80	101
5	–					(395)	350	125	114	97	399	368	110	111

Note: Connection size LK-1, LK-2 Ø4x Ø9 and LK-3, LK-4 Ø12 x Ø18. For information of TC type, please contact IWAKI or nearest distributor.

LK-A55 to LK-C87

Model	PVC				SUS				Note				
	L	a	b	c	L	a	b	c	H	d	e	f	g
LK-A5	476	325	-29	111	473	320	-32	108	520	180	240	260	300
A6	523	599	108	154	533	431	24	164					
B6	595		90	164	605		6	174	548	240	300	310	350
B7	599	600		167	610	465	23	178					
C7									615				
C8	605	647	114	173	609	633	107	177					

Note: These dimensions are common between PVC pump head and SUS pump head.
For information of TC type, please contact IWAKI or nearest distributor.

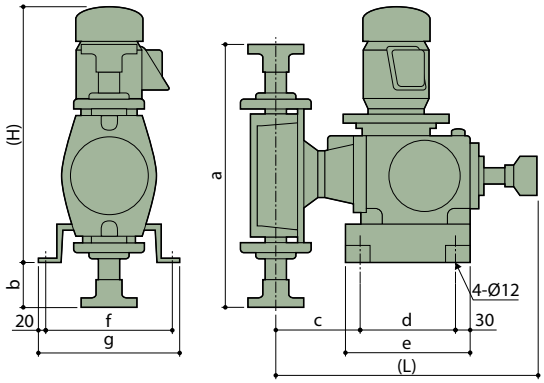

Points to Be Observed in Pump Installation and Piping

IWAKI metering pump LK series are reciprocating pumps employing the eccentric cam system.
Reciprocating pumps generate pulsation in the suction and discharge piping. Special consideration,
(different from the ordinary centrifugal pumps), should be given to this point when planning the pump installation and piping.

• Prevention of pipe vibration

Discharge side inertial resistance Pid < 0.1MPa

• Pid: Inertial resistance on discharge side

Inertial resistance means the pulsated impact force generated by the flow just upon entering discharge stroke. It is a phenomenon particular to a reciprocating pump which is generated as a result of the sudden application of acceleration to the liquid in the discharge piping. The condition "Pid < 0.1MPa is given above as an approximate standard. If Pid becomes 0.1MPa or higher, vibration on the pipe is generated. So measures should be taken to cope with the influence of vibration on the pump, too.

Measures

1. Install pulsation prevention device (air chamber).
2. Enlarge the diameter and shorten the length of the discharge piping.

• Prevention of overfeeding

Pump differential pressure > Inertial resistance Pi

• The larger one of the suction side or the discharge side

Overfeeding means excessive flow of the liquid due to abnormal functioning of the check valve caused by pulsation of the liquid in the piping. Check carefully in case the differential pressure is low and in case the piping is too long even with the differential pressure value at 0.03MPa.

Measures

1. Install air chamber.
2. Install back pressure valve

• Prevention of suction failure

NPSHa > NPSHr

NPSHa = Pa - Pv ± Phs - Pis * MPa

*Or Pfs: whichever is the larger.
(NPSH: Net positive suction head)

If NPSHa is not sufficient, the pump may be damaged by the flow-break or cavitation generated under such conditions.

• NPSHa : Absolute NPSH (MPa)
• NPSHr : Required NPSH (value particular to the pump) (MPa)
• Pa : Absolute pressure onto the tank liquid surface (MPa)
• PV : Liquid vapour pressure (MPa)
• Phs : Pressure caused by the height of the suction side (MPa)
(Flooded suction : +, Negative suction : –)
• Pis Inertial resistance on the suction side (MPa)
• Pfs Piping resistance on the suction side (MPa)

Optional accessories

Siphon preventing valve



Model		BVC-1P□L-□H	BVC-1P□-□H
Applicable capacity		Up to 1L/min	
Setting pressure		0.05 - 0.2MPa	0.2 - 0.8MPa
Material		PVC, FKM (EPDM)	
Connection mm (Applicable tube diameter)	Inlet	4 x 9, 12 x 18	
	Outlet	R3/8 and PT1/2	

□: Symbol for material of O-ring ("V" for FKM, "E" for EPDM)

Air chamber



PVC, A Type



PVC, N Type



SUS, A Type



SUS, A Type

Model	Body	Applicable capacity L	Setting pressure MPa	Connection Nominal size DIN PN 10 flange	Weight kg
A-1V□-S	PVC	1.0	0.5	Common for 15A - 25A	2
A-2V□-S		2.0			2.5
A-5V□-S		5.0			4.5
N40A-10V(2)-FS*		10		40A	16
N50A-20V(2)-FS*		20		50A	26
N65A-30V(2)-FS*		30		65A	49
A-05S6-15S	SUS316	0.5	0.9	15A	3
A-1S6-( )S		1.5		15A, 25A	5
A-5S6-( )S		5.0		25A, 40A	12
A-10S6-( )S		10		25A, 40A, 50A	15
A-20S6-( )S		20		40A, 50A, 65A	29
A-36S6-( )S		36		65A	55

* : Materials of O-rings: "CR" for 10V / 20V and "FKM" for 10V2 / 20V2
□: Symbol for material of O-ring ("V" for FKM, "E" for EPDM)
( ): Symbol for connection (10, 15, 20, 25, 40, 50 or 65)
Note1: The weight is the value of the product only. (The weight of liquid applied is not included.)
Note2: Rigid PVC chamber may deteriorate with ultraviolet ray or the applied chemical liquid over a long period of time.The chamber should be replaced every three years to guarantee safety.

Relief valve and back pressure valve



PVC type



SUS type

List of relief valve

Model	Body	Max. capacity L/min	Setting pressure MPa	Connection Nominal size DIN PN 10 flange, unless otherwise specified	Weight kg
RV-1P□-4H	PVC	1.0	0.3 - 0.8	Ø4 x Ø9 PVC Hose	0.2
RV-1P□-12H		1.0	0.3 - 0.8	Ø12 x Ø18 PVC Hose	0.2
RV-1P□-15S		1.0	0.3 - 0.8	15	0.5
RV-1P□B-15S		1.0	0.8 - 1.0	15	0.5
RV-3P-15S		3.0	0.3 - 1.0	15	0.6
RV-3P-25S		3.0	0.3 - 1.0	25	0.9
RV-3P□-12H		3.0	0.3 - 1.0	Ø12 x Ø18 PVC Hose	0.4
RV-7V-25S		7.5	0.3 - 0.8	25	3.5
RV-7VB-25S		7.5	0.8 - 1.0	25	3.5
RV-25V-25S		25	0.3 - 0.8	25	4.0
RV-25V-40S		25	0.3 - 0.8	40	4.0
N50RV-5V-F5		45	0.15 - 0.5	50	18
N50RV-5V2-F5		45	0.15 - 0.5	50	18
N65•50RV-5V-FS		65	0.15 - 0.5	65	18
N65•50RV-5V2-FS		65	0.15 - 0.5	65	18
RV-2S6-15S	SUS	2.0	0.3 - 0.8	15	3.5
RV-2S6B-15S		2.0	0.8 - 1.5	15	3.5
RV-7S6-25S		7.5	0.3 - 0.8	25	6
RV-7S6B-25S		7.5	0.8 - 1.5	25	6
RV-25S6-25S		25	0.3 - 0.8	25	7.0
RV-25S6B-25S		25	0.8 - 1.0	25	7.0
RV-25S6-40S		25	0.3 - 0.8	40	7.5
RV-25S6B-40S		25	0.8 - 1.0	40	7.5
N50RV-5S6-FS		75	0.15 - 0.5	50	29
N65RV-5S6-FS		120	0.15 - 0.5	65	42

□: Symbol for material of O-ring ("V" for FKM, "E" for EPDM)
O-ring material of N type is FKM for "5V2".
Note : Material for diaphragm is PTFE except RV-1P and N type.
O-ring material for "RV-1P" and "N" type is same as diaphragm material.

List of back pressure valve

Model	Body	Flow range L/min	Setting pressure MPa	Connection Nominal size DIN PN 10 flange, unless otherwise specified	Weight kg
BV-1P□-4H	PVC	0.005 - 1.0	0.2 - 0.8	Ø4 x Ø9 PVC Hose	0.2
BV-1P□-12H		0.005 - 1.0	0.2 - 0.8	Ø12 x Ø18 PVC Hose	0.2
BV-1P□-15S		0.005 - 1.0	0.2 - 0.8	15	0.5
BV-1P□L-4H		0.005 - 1.0	0.05 - 0.2	Ø4 x Ø9 PVC Hose	0.2
BV-1P□L-12H		0.005 - 1.0	0.05 - 0.2	Ø12 x Ø18 PVC Hose	0.2
BV-1P□L-15S		0.005 - 1.0	0.05 - 0.2	15	0.5
BV-3P□-12H		0.03 - 3.0	0.1 - 0.8	Ø12 x Ø18 PVC Hose	0.4
BV-3N□-12H		0.005 - 3.0	0.1 - 0.3	Ø12 x Ø18 PVC Hose	0.4
BV-3P-15S		0.03 - 3.0	0.1 - 0.8	15	0.6
BV-3P-25S		0.03 - 3.0	0.1 - 0.8	25	0.9
BV-7V-25S		0.2 - 7.5	0.05 - 0.8	25	3.5
BV-25V-25S		2 - 25	0.1 - 0.8	25	4.0
BV-25V-40S		2 - 25	0.1 - 0.8	40	4.0
N50BV-5V-FS		2.5 - 50	0.15 - 0.5	50	20
N50BV-5V2-FS		2.5 - 50	0.15 - 0.5	50	20
N65•50BV-5V-FS		5 - 70	0.15 - 0.5	65	20
N65•50BV-5V2-FS		5 - 70	0.15 - 0.5	65	20
BV-2S6-15S	SUS	0.02 - 2.0	0.05 - 0.8	15	3.5
BV-7S6-25S		0.2 - 7.5	0.05 - 0.8	25	6
BV-25S6-25S		2 - 25	0.1 - 0.8	25	7.0
BV-25S6-40S		2 - 25	0.1 - 0.8	40	7.5
N50BV-5S6-FS		2.5 - 80	0.15 - 0.5	50	29
N65BV-5S6-FS		5 - 120	0.15 - 0.5	65	42

□: Symbol for material of O-ring ("V" for FKM, "E" for EPDM)
O-ring material of N type is CR for "5V" and FKM for "5V2".
Note : Material for diaphragm is PTFE except BV-1P and N type.
O-ring material for "BV-1P" and "N" type is same as diaphragm material.

IWAKI CO., LTD. 6-6 Kanda-Sudacho 2-chome Chiyoda-ku Tokyo 101-8558 Japan TEL : (81)3 3254 2935 FAX : 3 3252 8892

IWAKI has global net work.
Please find your distributor location at **www.iwakipumps.jp**

European Headquarter	**IWAKI Europe GmbH**	TEL: (49)2154 9254 0	FAX: (49)2154 9254 48	U.S.A.	**IWAKI America Inc.**	TEL: (1)508 429 1440	FAX: (1)508 429 1386
Germany	**IWAKI Europe GmbH**	TEL: (49)2154 9254 50	FAX: (49)2154 9254 55	Brazil	IWAKI Do Brasil Comercio De Bombas Hidraulicas LTDA.	TEL: (55)19 3244 5900	FAX: (55)19 3244 5900
The Netherlands (Netherlands Branch)	**IWAKI Europe GmbH**	TEL: (31)74 2420011	FAX: (49)2154 9254 48	China (Shanghai)	**IWAKI Pumps (Shanghai) Co., Ltd.**	TEL: (86)21 6272 7502	FAX: (86)21 6272 6929
Italy (Italy Branch)	**IWAKI Europe GmbH**	TEL: (39)0445 561219	FAX: (39)0445 569088	China (Hong Kong)	**IWAKI Pumps Co., Ltd.**	TEL: (852)2607 1168	FAX: (852)2607 1000
Spain (Spain Branch)	**IWAKI Europe GmbH**	TEL: (34)934 741 638	FAX: (34)934 741 638	China (Guangzhou)	**GFTZ IWAKI Engineering & Trading Co., Ltd.**	TEL: (86)20 84350603	FAX: (86)20 84359181
Poland (East Europe Branch)	**IWAKI Europe GmbH**	TEL: (48)12 347 0755	FAX: (48)12 347 0900	Singapore	**IWAKI Singapore Pte Ltd.**	TEL: (65)6316 2028	FAX: (65)6316 3221
Denmark	**IWAKI Nordic A/S**	TEL: (45)48 242345		Indonesia (Indonesia Office)	**IWAKI Singapore Pte Ltd.**	TEL: (62)21 6906606	FAX: (62) 21 6906612
Finland	**IWAKI Suomi Oy**	TEL: (358)10 201 0490		Malaysia	**IWAKIm SDN. BHD.**	TEL: (60)3 7803 8807	FAX: (60)3 7803 4800
Norway	**IWAKI Norge AS**	TEL: (47)23 38 49 00		Korea	**IWAKI Korea Co.,Ltd.**	TEL: (82)2 6238 4800	FAX: (82)2 6238 4801
Sweden	**IWAKI Sverige AB**	TEL: (46)8 511 72900		Taiwan	**IWAKI Pumps Taiwan Co., Ltd.**	TEL: (886)2 8227 6900	FAX: (886)2 8227 6818
Belgium	**IWAKI Belgium N.V.**	TEL: (32)13 670200	FAX: (32)13 672030	Thailand	**IWAKI (Thailand) Co.,Ltd.**	TEL: (66)2 322 2471	FAX: (66)2 322 2477
France	**IWAKI France S.A.**	TEL: (33)1 69 63 33 70	FAX: (33)1 64 49 92 73	Australia	**IWAKI Pumps Australia Pty Ltd.**	TEL: (61)2 9899 2411	FAX: (61)2 9899 2421

( )Country codes

Caution for safety use:
Before use of pump, read instruction manual carefully to use the product correctly.

Actual pumps may differ from the photos. Specifications and dimensions are subject to change without prior notice. For further details please contact us.

Legal attention related to export.

Our products and/or parts of products fall in the category of goods contained in control list of international regime for export control. Please be reminded that export license could be required when products are exported due to export control regulations of countries.

The posting and copying from this catalogue without permission is not accepted firmly.